

Straight Blade Devices

50 Amp 125/250V and 3Ø 250V AC; 3-Pole 4-Wire and 3ØY 120/208V AC; 4-Pole 4-Wire



9450NP



9452ANPB




9450FR



RR450FW



RR450



NEMA 14-50
50A 125/250V



NEMA 15-50
50A 3Ø 250V



NEMA 18-50
50A 3ØY 120/208V AC

PLUGS Inches (mm)

Description	Color	Cord Diameter	Catalog Number		
Thermoplastic	Gray	.425-1.320 (10.8-33.5)	9450NP	8450NP	—

ANGLE PLUGS Inches (mm)

Description	Color	Cord Diameter	Catalog Number		
Nylon	Black/ White	.625-1.320 (15.9-33.5)	9452ANPB	8452ANPB	8352ANPB
Residential grade; with ground; 3-pole, 4-wire; plugs supplied with interchangeable blades for 30 or 50 amp config.	Black	.600-1.110 (15.2-28.2)	RR435P	—	—

FLUSH RECEPTACLES

Description	Color	Catalog Number		
RTP*	Black	9450FR	8450FR	8350FR
Residential grade; without ground; 3-pole, 4-wire;	Black	RR450F	—	—
mounts on 1- or 2-gang box	White	RR450FW	—	—

PANEL MOUNT RECEPTACLES

Description	Color	Catalog Number		
Residential grade; with ground; 3-pole, 4-wire	Black	RR450PM	—	—

SURFACE RECEPTACLES

Description	Color	Catalog Number		
Residential grade; with ground; 3-pole, 4-wire	Black	RR450	—	—

WALLPLATES FOR FLUSH RECEPTACLES Inches (mm)


Description	Color	Standard	Mid-Size	Material	Catalog Number
1-Gang; 2.15 in. (54.6) diameter opening	Ivory	NP724I	NPJ724I	Chrome	SCH723
	White	NP724W	NPJ724W	Stainless Steel	SS723
2-Gang; 2.15 in. (54.6) diameter opening	Ivory	NP703I	NPJ703I	Stainless Steel	SS703
	White	NP703W	NPJ703W		

Note: *RTP – Reinforced Thermoplastic Polyester.

See section O for more information on plates.

Receptacles fit standard boxes 4 $\frac{1}{16}$ " square and not less than 2.23 (54.0) deep.

PRODUCT DIMENSIONS Inches (mm)

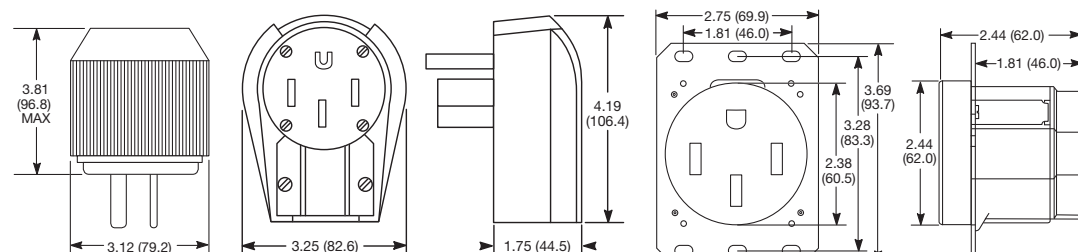

9450NP

9452ANPB

9450FR