



Industrial Equipment Cabinet

NEMA12 for Harsh Applications

Pre-configured and Unloaded Versions Available

Pre-punched Rear Panel for the Same Functions as Commercial REBOX

Locking and Grounding Hardware Kits Available



SPECIFICATIONS

- ◆ 14 gauge steel construction on body and door
- ◆ Continuously plasma-welded seams
- ◆ ¼ turn oil-tight latches on door
- ◆ Poured-in polyurethane gasket on door
- ◆ ANSI 61 Gray polyester inside and out over phosphatized surfaces
- ◆ Industrial REBOX Dimensions:
IR2UG: 24"H x 24"W x 12"D
IR3UG: 36"H x 24"W x 12"D
IR4UG 48"H x 24"W x 12"D

Hubbell's Industrial REBOX® is designed for harsh environments where oil, dirt dust and moisture are present. It meets NEMA type 4, 12 and 13 requirements.

The Industrial REBOX includes a dust and watertight gasket built into the door. A specially designed mounting plate at the rear of the enclosure allows mounting of standard REBOX accessories, brackets and kits. Unloaded versions are available, without the mounting plate, to allow user-configurable brackets to be installed.

APPROVALS

- Dust and watertight to NEMA12
- UL Listed to UL508 type 12 enclosures*
- CSA Certified types 4 and 12**
- NEMA/EEMAC types 4, 12, and 13
- JIC EL-1-7



APPLICATIONS

- ✓ Factory floor and process control
- ✓ Convention centers
- ✓ Harsh institutions - correctional facilities
- ✓ Commercial kitchens

* UL File #E64791

** CSA File #LL66078

ORDER INFORMATION

**REBOX® - Industrial Equipment Cabinet**

Delivery: 1 enclosure

Pre-Configured versions include:

REK19 - Bottom Hinged Patch Panel Bracket, 4U**REKZ** - Equipment Mounting Bracket, 5U

Rack Units	Height	Width	Depth	Version	Color	Catalog No.
13	24" (610)	24" (610)	12" (305)	Unloaded	Gray	IR2UG
20	36" (914.4)	24" (610)	12" (305)	Unloaded	Gray	IR3UG
27	48" (1219.2)	24" (610)	12" (305)	Unloaded	Gray	IR4UG
20	36" (914.4)	24" (610)	12" (305)	Pre-Configured	Gray	IR3PG
27	48" (1219.2)	24" (610)	12" (305)	Pre-Configured	Gray	IR4PG


① Front cover ¼-turn latches for secure closure

② Dust and water-tight gasket on door


③ Rear mounting panel with equipment mounting brackets (pre-configured enclosures only)

④ Print pocket is provided

DIMENSIONS

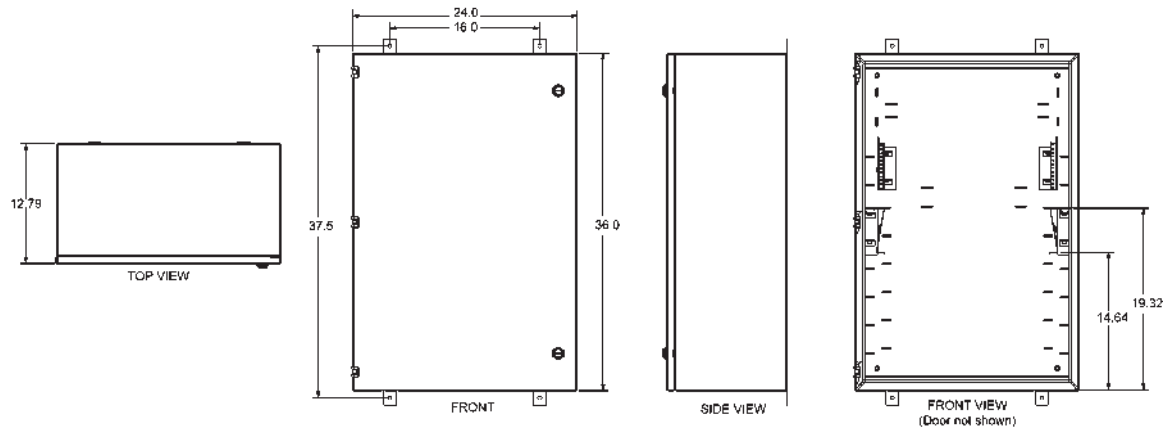

ACCESSORIES

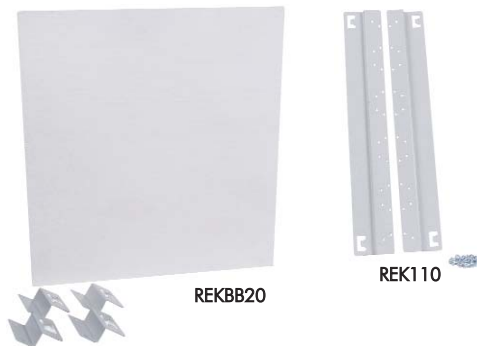

Description

Catalog No.

Plywood Backboard, 20"H x 19"W (for wall mounting)

REKBB20

Plywood Backboard, 30"H x 19"W (for wall mounting)

REKBB30

Plywood Backboard, 40"H x 19"W (for wall mounting)

REKBB40

Equipment Mounting Bracket, 5U

REKZ

110/66 Block Mounting Rails (accepts five 100-pair/110-pair blocks)

REK110

Patch Panel Bracket, Bottom-hinged, 4U

REK19

Patch Panel Bracket, Fiber Optic (accepts 1 FSP adapter panel)

REKFP

Economy Power Supply Kit, 15A

REKP

REKZ



REKFP



REK19



REKP

**Hubbell Premise Wiring**

HUBBELL INCORPORATED (Delaware)

14 Lord's Hill Road • Stonington, CT 06378-0901 • (860) 535-8326 • 800-626-0005

Fax: (860) 535-8328 • Internet site: <http://www.hubbell-premise.com>**Worldwide Locations**

Hubbell Premise Wiring, Asia Pacific
 Hubbell Canada Inc.
 Hubbell Premise Wiring, China
 Hubbell Premise Wiring, Europe
 Hubbell Int'l. Inc., Korea Branch
 Hubbell Premise Wiring, Latin America

852-2836-7131
 905-839-1138
 8621-6309-0119
 44-(0)1234-848550
 82-2-(0)2607-1363
 305-251-4236

Fax: 852-2836-7132
 Fax: 905-839-9108
 Fax: 8621-6309-0122
 Fax: 44-(0)1234-856190
 Fax: 82-2-(0)2603-7386
 Fax: 305-251-4087

Hubbell de Mexico, S.A. de C.V.
 Hubbell Premise Wiring, Middle East
 Hubbell Premise Wiring, Puerto Rico
 Hubbell-Taian Co., Ltd., Taiwan
 Hubbell Incorporated, Turkey
 Hubbell Premise Wiring, Venezuela

52-5-559-5304
 971-4-393-4192
 787-720-7185
 886-2-(0)2515-0855
 90-216-414-8147
 58-16-6807453

Fax: 52-5-559-5885
 Fax: 971-4-393-4194
 Fax: 787-789-2796
 Fax: 886-2-(0)2515-0899
 Fax: 90-216-414-8148
 Fax: 58-281-2820323

DS-M35 07/03