

Installation Instructions

TAMPER-RESISTANT OR NON-TAMPER-RESISTANT OUTLET

15A-125V AC/CA, 20A-125V AC/CA


READ THESE INSTRUCTIONS
BEFORE INSTALLING

PK-A3512-10-00-0C-W

Cat. Nos. ECBR1, ECBR2,
and ETCR1



**FAST, SAFE, and EASY
to INSTALL**

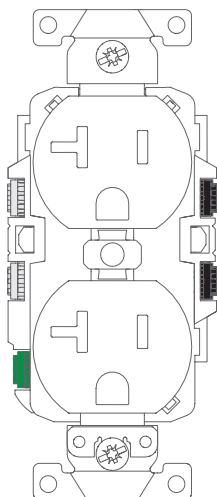

Leviton's Lever Edge Outlet makes it fast, safe, and easy to install a new outlet.

Colored levers easily identify where to connect each wire.

There are no exposed wires or metal parts after installation.

Built-in strip gauge.


1



Features

Terminates wire with a snap

The colored levers snap shut to terminate the wires.

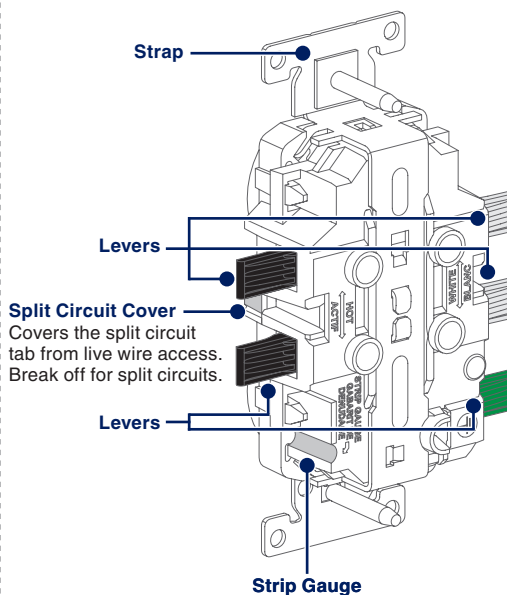


Strip Gauge

2



Lever Edge Wiring Feature

The color-coded levers easily identify where to connect the wallbox wires to the outlet.

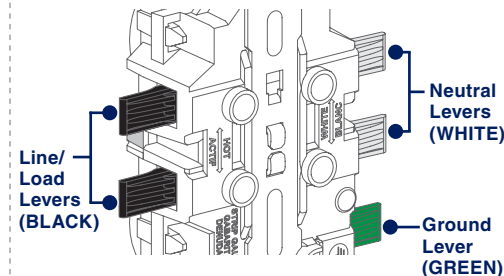

NOTE: Wire colors in your wallbox may be different from the lever colors. See "Preparing Wires," on page 5 to make sure you insert the wires properly.

3

If you need help...

ONLINE
www.leviton.com/support

CHAT
www.leviton.com/contact

CALL
1-800-824-3005 (USA)
1-800-405-5320 (Canada)

Leviton Manufacturing Co., Inc.
201 North Service Road, Melville, NY 11747

© 2025 Leviton Manufacturing Co., Inc. All rights reserved.

Specifications subject to change at any time without notice.




Recommended Tools


Slotted/Phillips/Robertson
Screwdriver



Wire Stripper



Needle Nose Pliers



Voltage Tester




4



Preparing Wires

WARNING: TO AVOID FIRE, SHOCK, OR DEATH, TURN OFF POWER at circuit breaker or fuse and test that power is OFF before wiring!


1. Make sure that the ends of the wires from the wallbox are straight (cut if necessary).



NOTE: Use with #10, #12, or #14 AWG solid or stranded copper wire only.

2. Strip each wire in the wallbox, as shown below.

Use Built-in
Strip Gauge on the Outlet



OR
Use Strip Gauge
as shown below
(measure bare wire here)



17/32 in.
(1.35 cm)

5




Wiring Your Device

1. Remove the existing outlet.

2. Verify that you have a Line (Black) wire, Neutral (White) wire, and a Ground (Bare Copper or Green) wire.

NOTE: Work on only one connection at a time.


3. Fully open lever.



4. Insert the proper wire per lever color into the wire hole. Make sure the wire is fully inserted and no bare wire is exposed.

NOTE: If using stranded wire twist wire before insertion.

5. Fully close lever.




6. To complete wiring, proceed to page 7 or 8.

6



Common Feed Wiring

1. Connect the wires as shown.

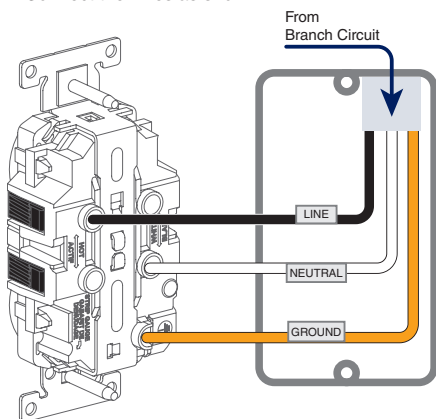


If your back box looks different, consult an electrician.

7




Split Circuit Wiring

1. Break off plastic tab on hot side.



2. Break off split circuit tab on hot side.

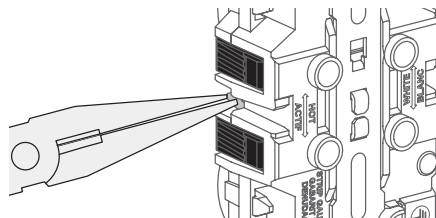


8



Split Circuit Wiring (continued)

3. Connect the wires as shown.

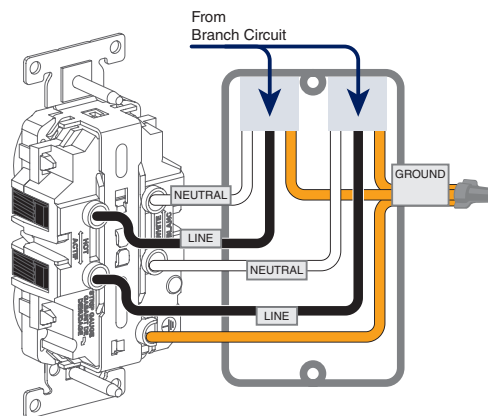


If your back box looks different, consult an electrician.

9



Test

1. Position all wires so that there is room in the wallbox for the device.
2. Partially screw the mounting screws into the wallbox's mounting holes.

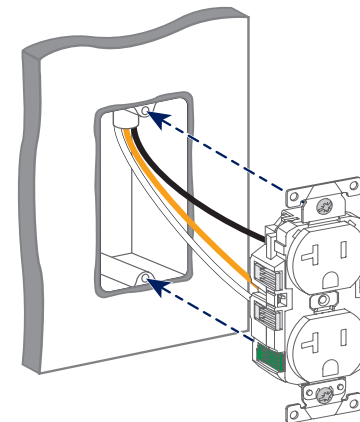

3. Restore power at the circuit breaker or fuse.
4. Test outlet.

10



Test (continued)

WARNING: Turn the power OFF at the breaker or fuse before you complete the installation.

5. Tighten the mounting screws into wallbox.
6. Install wallplate, and restore power.

If you are unsure about the installation process, contact Leviton Technical Support, or contact an electrician.

11



Safety First

WARNINGS:

- **TO AVOID FIRE SHOCK OR DEATH; TURN OFF POWER** at circuit breaker or fuse when servicing, installing or removing device.
- This product is to be installed and/or used in accordance with electrical codes and regulations.
- If you are unsure about any part of these instructions, consult an electrician.

CAUTIONS:

- Use this device with **solid or stranded copper wire only**.
- To avoid damage to the product, **DO NOT** use disinfecting products, including foggers, sprays or other types of atomized cleaning agents.
- **DO NOT** spray liquid onto the product.
- To clean, use a damp cloth with mild soap.
- Keep all levers in the closed position except when wiring the product.

12



Limited 2 Year Warranty & Exclusions

PATENT STATEMENT

Patents covering this product, if any, can be found on Leviton.com/patents.

For Leviton's limited product warranty, go to www.leviton.com. For a printed copy of the warranty, call 1-800-824-3005.

FOR CANADA ONLY

For warranty information and/or product returns, residents of Canada should contact Leviton in writing at **Leviton Manufacturing of Canada ULC** to the attention of the **Quality Assurance Department, 165 Hymus Blvd, Pointe-Claire (Quebec), Canada H9R 1E9** or by telephone at 1 800 405-5320.

13

Scan to learn more.



Visit leviton.com/support or contact Technical Services at 1-800-824-3005 for additional help.

WEB VERSION