

23CM-11



UPC Code : 078477800959

Country Of Origin : Mexico

NEMA :  L5-20P

Locking Plug, 20 Amp, 125 Volt, Industrial Grade, Corrosion Resistant, Yellow & White

20 Amp, 125 Volt, NEMA L5-20P, 2P, 3W, Locking Plug, Industrial Grade, Grounding, Corrosion-Resistant - YELLOW-WHITE

Leviton's Black & White line of industrial grade plugs, connectors, flanged inlets, and outlets offer superior performance, long lasting reliability and features that are backed by a limited lifetime warranty:

- Captive, quick drive assembly screws for faster assembly
- Unique cord clamp accepts wide range of cord sizes
- Rugged nylon construction resists impact, heat, chemicals, and rough use
- Industry exclusive limited lifetime warranty
- For use in marine and industrial environments

Technical Information

Electrical Specifications

Amperage : 20 A

Current Interrupting : Certified for current interrupting at full rated current

Dielectric Voltage : Withstands 2000V per UL498

Grounding : Grounding

Pole : 2

Temperature Rise : Max 30C at 250 cycles OL at 200 pct rated current

Voltage : 125 VAC

Wire : 3

Environmental Specifications

Environment : Corrosive

Flammability : Rated V-2 per UL 94

Operating Temperature : -40° C to 60°C

Material Specifications

Assembly Screws : Stainless Steel 300

Back Cover : Thermoplastic

Blades/Contacts : Nickel-Plated Brass

Body Material : Super Tough ST801 Nylon

Clamp Insert : Nylon

Color : Yellow-White

Cord-Clamp : Nylon

Mechanical Specifications

Cord Range : .218 - .430

Product ID : Ratings and NEMA I.D. permanently marked on device

Screw Terminal Torque : 10-14 in-lbs

Terminal Accom. : 18-10 AWG

Terminal ID : Brass-Hot, Green-Ground, Silver-Neutral

Face Material : Nylon

Terminal Screws : Nickel-Plated Brass 8-32

Product Features

Body Material : Super Tough ST801 Nylon

Brand : Black and White

Color : Yellow-White

Cord Range : .218 - .430

NEMA : L5-20P

Standards and Certifications

ANSI : C-73

CSA C22.2 No. 42 : File LR-406

NEMA : WD-6


NOM : 057

UL : 498

UL Fed Spec WC-596 : File E13393

Warranty : Limited Lifetime Warranty

Wiring Diagram

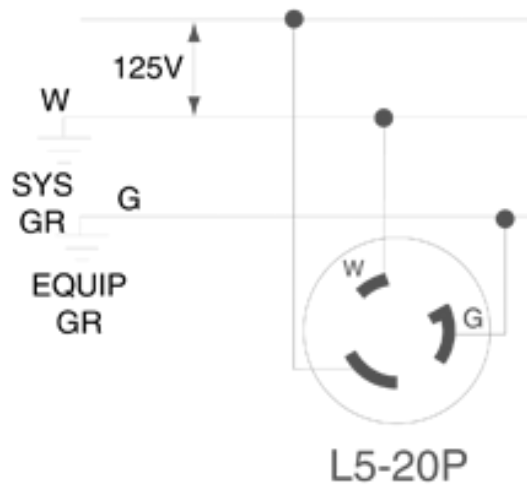

SPECIFICATION SUBMITTAL

JOB NAME: 	CATALOG NUMBERS: 	
JOB NUMBER: 		

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.
T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-461-2002 ·
FAX: +1-800-824-3005 ·

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52) 5386- 1797 ·

Visit our Website at: www.leviton.com

© 2026 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:
www.leviton.com/company/about-leviton/locations

© 2026 Leviton Manufacturing Co., Inc.