


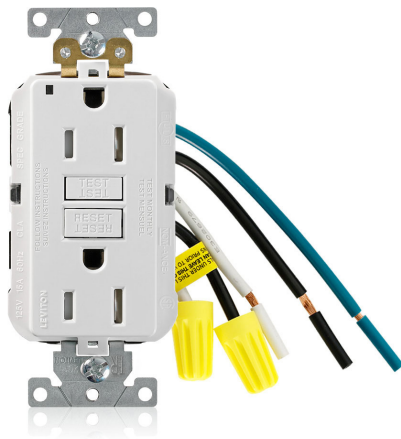


Color :  White

UPC Code : 078477724118

Country Of Origin : China

NEMA :  5-15R

Available Colors :

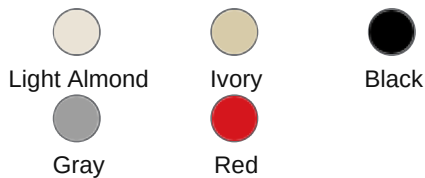

GFTR1-5LW

15 Amp SmartlockPro® GFCI Receptacle/Outlet, Industrial Grade, Tamper-Resistant

SmartlockPro GFCI Self-Test Duplex Receptacle Outlet, Extra Heavy-Duty Industrial Specification Grade, Tamper-Resistant, Power Indication, 15 Amp, 20 Amp Feed-Through, 125 Volt, Pre-Wired Leads, NEMA 5-15R, 2-Pole, 3-Wire, Self-Grounding - White

Technical Information

AC Horsepower Ratings

At Rated Voltage : 1 HP

Electrical Specifications

Amperage : 15 A & 20 A Feed-Through

Dielectric Voltage :
Withstands 1250VAC per UL 943 and CSA-C22.2 No. 144.1-06

Grounding : Self-Grounding

Pole : 2

Short Circuit Current Rating :
10kA

Temperature Rise : Max 30C after 250 cycles overload at 200 percent rated current

Trip Level : Class A, 5mA plus or minus 1mA

Voltage : 125 VAC

Wire : 3

Environmental Specifications

Flammability : Rated V-0 per UL 94

Operating Temperature : -35C to +66C

Material Specifications

Body Material : Polycarbonate

Face Material : PBT

Ground Clips : Brass

Line Contacts : Brass

Shutter Mechanism : Delrin® Acetal

Strap Material : Galvanized Steel

Torque Range : 14 – 18 in.-lbs

Mechanical Specifications

Lead Identification : Black-Hot, White-Neutral, Green-Ground

Product ID : Ratings are permanently marked on device

Product Features

Brand : SmartlockPro

Color : White

Device Type : Duplex Receptacle Outlet

Screw Terminal Torque : 14-18 in-lbs

Termination : Pre-Wired Leads

Wire Leads : #6" long 12 AWG TEW line & load leads plus ground leads

Standards and Certifications

ANSI : C-73

Applicable Standards : UL 943, UL 498, CSA C22.2 No. 42 & 144, FedSpec W-C-596

Certification/Listing : UL, CSA, NOM-ANCE

NEMA : WD-1 & WD-6

Feature : Tamper-Resistant|Power Indication

Function : GFCI

Grade : Extra Heavy-Duty Industrial Specification Grade

NEMA : 5-15R

Warranty

Warranty : 2-Year Limited

Patents *

CA2621644

MX302458

US7355117

US7820909

US8242362

US8599522

US9077091

CA2677283

MX308495

US7697252

US7868719

US8587914

US9053886

This list is provided for patent marking purposes only. A good faith effort is made to maintain the accuracy and completeness of this list. No legal inference should be drawn from the omission of a patent from this list.

SPECIFICATION SUBMITTAL

JOB NAME: 	CATALOG NUMBERS: 	
JOB NUMBER: 		

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.

T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-461-2002 ·

FAX: +1-800-824-3005 ·

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)

5386- 1797 ·

Visit our Website at: www.leviton.com

© 2026 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/company/about-leviton/locations

© 2026 Leviton Manufacturing Co., Inc.