

# TBR20-S2

20 Amp, 125/250 Volt, Duplex Receptacle Outlet, Commercial Grade

Duplex Receptacle Outlet, Commercial Specification Grade, Two Outlets Marked "Controlled", Tamper-Resistant, Smooth Face, 20 Amp, 125 Volt, Back or Side Wire, NEMA 5-20R, 2-Pole, 3-Wire, Self-Grounding - Brown

**ROHS Compliant :** Yes

Leviton offers custom imprinting solutions to meet the 2014 National Electrical Code requirements for identifying receptacles that will be automatically de-energized as part of an overall plug load control program. All 15A & 20A, 125V receptacles that are automatically controlled will be marked with a specific symbol.




**Color :**  Brown

**UPC Code :** 078477761021

**Country Of Origin :** Mexico

**NEMA :**  5-20R

**Available Colors :**

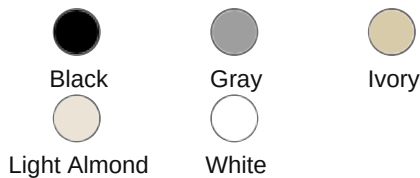

## Technical Information

### AC Horsepower Ratings

**At Rated Voltage :** 1/2 HP

### Electrical Specifications

**Amperage :** 20 A

**Dielectric Voltage :**  
Withstands 2000V per UL498

**Grounding :** Self-Grounding

**Pole :** 2

**Temperature Rise :** Max 30C  
after 250 cycles OL at 200  
percent rated current

**Voltage :** 125 VAC

**Wire :** 3

### Environmental Specifications

**Operating Temperature :** -40°  
C to 60°C

### Material Specifications

**Body Material :** Polypropylene

**Face Material :** Polypropylene

**Ground Clips :** Brass

**Grounding Screw :** Brass 8-32

**Line Contacts :** Brass Double-  
Wipe .031 Thick

**Strap Material :** Brass .050"

**Terminal Clamp :** Brass

**Terminal Screws :** Brass 10-32

### Mechanical Specifications

**Product ID :** Ratings are  
permanently marked on device

**Screw Terminal Torque :** 14-  
18 in-lbs

**Terminal Accom. :** 14-10 AWG

### Product Features

**Color :** Brown

**Device Type :** Duplex  
Receptacle Outlet

**Terminal ID :** Brass-Hot,  
Green-Ground, Silver-Neutral

**Termination :** Back or Side  
Wire

**Wire Type :** Solid or Stranded  
Building Wire

Standards and Certifications

**ANSI :** C-73

**Applicable Standards :** UL  
498, CSA C22.2 No. 42

**Certification/Listing :** UL,  
CSA, NOM-ANCE

**NEMA :** WD-1 & WD-6

**Feature :** Two Outlets Marked  
Controlled|Tamper-  
Resistant|Smooth Face

**Grade :** Commercial  
Specification Grade

**NEMA :** 5-20R

Warranty

**Warranty :** 10-Year Limited

**SPECIFICATION SUBMITTAL**

|                                            |                                                 |                      |
|--------------------------------------------|-------------------------------------------------|----------------------|
| <b>JOB NAME:</b><br><input type="text"/>   | <b>CATALOG NUMBERS:</b><br><input type="text"/> | <input type="text"/> |
| <b>JOB NUMBER:</b><br><input type="text"/> | <input type="text"/>                            | <input type="text"/> |

**Leviton Manufacturing Co., Inc**

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.

T. Monday-Friday): +1-800-824-3005

**Leviton Manufacturing of Canada, Ltd.**

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-461-2002 ·

FAX: +1-800-824-3005 ·

**Leviton S. de R.L. de C.V.**

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)

5386- 1797 ·

**Visit our Website at:** [www.leviton.com](http://www.leviton.com)

© 2026 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without  
notice.

**Leviton has a global presence.**

If you would like to know where your local Leviton office is located please go to:

[www.leviton.com/company/about-leviton/locations](http://www.leviton.com/company/about-leviton/locations)

© 2026 Leviton Manufacturing Co., Inc.