

TBR20-S2G

20 Amp, 125/250 Volt, Duplex Receptacle Outlet, Commercial Grade

Duplex Receptacle Outlet, Commercial Specification Grade, Two Outlets Marked "Controlled", Tamper-Resistant, Smooth Face, 20 Amp, 125 Volt, Back or Side Wire, NEMA 5-20R, 2-Pole, 3-Wire, Self-Grounding - Gray

ROHS Compliant : Yes

Leviton offers custom imprinting solutions to meet the 2014 National Electrical Code requirements for identifying receptacles that will be automatically de-energized as part of an overall plug load control program. All 15A & 20A, 125V receptacles that are automatically controlled will be marked with a specific symbol.




Color :  Gray

UPC Code : 078477761069

Country Of Origin : Mexico

NEMA :  5-20R

Available Colors :

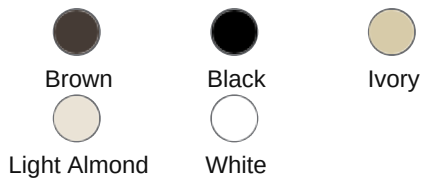

Technical Information

AC Horsepower Ratings

At Rated Voltage : 1/2 HP

Electrical Specifications

Amperage : 20 A

Dielectric Voltage :
Withstands 2000V per UL498

Grounding : Self-Grounding

Pole : 2

Temperature Rise : Max 30C
after 250 cycles OL at 200
percent rated current

Voltage : 125 VAC

Wire : 3

Environmental Specifications

Flammability : Rated V-2 per
UL94

Operating Temperature : -40°
C to 60°C

Material Specifications

Body Material : Polypropylene

Face Material : Polypropylene

Ground Clips : Brass

Grounding Screw : Brass 8-32

Line Contacts : Brass Double-
Wipe .031 Thick

Strap Material : Brass .050"

Terminal Clamp : Brass

Terminal Screws : Brass 10-32

Mechanical Specifications

Product ID : Ratings are
permanently marked on device

Screw Terminal Torque : 14-
18 in-lbs

Terminal Accom. : 14-10 AWG

Product Features

Color : Gray

NEMA : 5-20R

Terminal ID : Brass-Hot,
Green-Ground, Silver-Neutral

Termination : Back or Side
Wire

Wire Type : Solid or Stranded
Building Wire

Standards and Certifications

ANSI : C-73

Applicable Standards : UL
498, CSA C22.2 No. 42

Certification/Listing : UL,
CSA, NOM-ANCE

NEMA : WD-1 & WD-6

Warranty

Warranty : 10-Year Limited

SPECIFICATION SUBMITTAL

JOB NAME: 	CATALOG NUMBERS: 	
JOB NUMBER: 		

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.

T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-461-2002 ·

FAX: +1-800-824-3005 ·

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)

5386- 1797 ·

Visit our Website at: www.leviton.com

© 2026 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without
notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/company/about-leviton/locations

© 2026 Leviton Manufacturing Co., Inc.