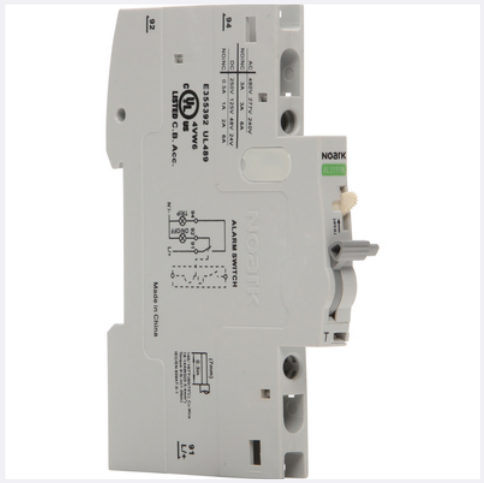


NOARK

AL3111N

Alarm (AL) ON/OFF and TRIP signalling contact/switch UL489 - 1001201 - 1NO+1NC

Auxiliary combined ON/OFF and TRIP signalling contact / switch block - for UL489 devices - NOARK - 1NO+1NC (1 Normally Open + 1 Normally Closed) aux. contacts - DIN rail mounting (35mm width) - equivalent to 1001201

Additional information

The technical information provided in the datasheet is subject to change without notice. For confirmation, please contact NOARK's product support team.

Specifications

Primary brand	NOARK
Main function	Auxiliary contact
Product series / family name	Electrical protection > MCBs accessories > UL489 > Aux. contacts
Functions	Auxiliary combined ON/OFF and TRIP signalling contact / switch block
Design	for UL489 devices
Rated current	0.5A (250Vdc) 1A (125Vdc) 2A (48Vdc) 3A (480Vac / 277Vac) 6A (240Vac / 24Vdc)
Cross-section	for #18AWG...#14AWG / 0.5mm2...4mm2 Cu wires at 140/167°F / 60/75°C
Mounting mode	DIN rail
Normally Open (NO) auxliary contacts	1 NO contacts
Normally Closed (NC) auxiliary contacts	1 NC contacts
Contacts type	1NO+1NC (1 Normally Open + 1 Normally Closed) aux. contacts
Dimensions	H103mm x W8.8mm x D75.5mm 7mm / 0.3" reference stripping length H4.06" x W0.35" x D2.97"
Net Width (mm)	35 mm

All rights reserved 2016-2026 to KYKLO and products.na.noark-electric.com

Order code / Manufacturer SKU	AL3111N 1001201
Manufacturer product status	Commercialized
Equivalent to	1001201
Compliant with standard(s)	UL 489 (file number E355392)
Tightening torque	9lb.in / 1 N.m

Documents

E-PLAN - NOARK - AL3111N - Part details

NOARK - DIN Rail Miniature Circuit Breakers - Ex9 B1 series - Datasheet.pdf

Access to all NOARK drawings

All rights reserved 2016-2026 to KYKLO and products.na.noark-electric.com