



## PHAETON : GARAGE & CANOPY LIGHT

### DESCRIPTION

The Phaeton is a high efficiency parking garage LED light fixture that features hybrid diffuser/lens optics with up-light prisms to create a new standard for low-glare and uniform illumination throughout the surrounding ceiling and floor areas. Phaeton also features Xi-Fi® technology, a powerful and easy to commission wireless lighting control system.

### FEATURES

- Integrated microwave occupancy sensor and photocell for daylight harvesting
- Architecturally attractive and modern design
- 135 lpw ultra-high efficiency
- Low glare and uniform illumination

### LISTINGS

- Complies with IESNA requirements
- IP65 Rated
- ROHS Compliant
- DesignLights Consortium® Premium Qualified - meets the requirements for the highest DLC qualification for efficacy and lumen maintenance

### PERFORMANCE

- Rated lifetime: L70 78,000 hours @ 58°C
- 4000K, 5000K CCT
- CRI: 80+

### ELECTRICAL

- Input voltage: 100-277V
- Power Factor: >.95
- THD: <20%

### THERMAL

- -40°F to 130°F (-40°C to 54°C) operating temperature

### CONSTRUCTION

- Powder-coated aluminum construction

### WARRANTY

- 7 year limited warranty; see eiko.com for warranty details

|                |         |
|----------------|---------|
| project name   | type    |
| catalog number |         |
| comments       | voltage |
| approved by    | date    |



### APPLICATIONS

- Garages
- Covered Roadways
- Tunnels
- Entrances to Buildings
- Canopy Areas



## ORDERING INFORMATION

EXAMPLE: VTU-20/20W/840-U-GY


| Model                                | Length          | Package         | CRI               | Voltage             | Dimming                  | IP Rating              | Mounting           |
|--------------------------------------|-----------------|-----------------|-------------------|---------------------|--------------------------|------------------------|--------------------|
| <b>XBPG</b> : Phaeton Parking Garage | <b>14</b> - 14" | <b>40</b> - 40W | <b>40</b> - 4000K | <b>U</b> - 100-277V | <b>Y</b> - 0-10V dimming | <b>65</b> - IP65 Rated | <b>C</b> - Ceiling |

PERFORMANCE SUMMARY

| Order Code | Item #           | Watts | Lumens | CCT   | CRI | Volts    | Dimming | DLC |
|------------|------------------|-------|--------|-------|-----|----------|---------|-----|
| 10879      | XBPG14-4040UY65C | 40W   | 5,385  | 4000K | 80+ | 100-277V | 0-10V   | ✓   |
| 10880      | XBPG14-4050UY65C | 40W   | 5,481  | 5000K | 80+ | 100-277V | 0-10V   | ✓   |
| 10881      | XBPG14-7540UY65C | 75W   | 10,079 | 4000K | 80+ | 100-277V | 0-10V   | ✓   |
| 10882      | XBPG14-7550UY65C | 75W   | 10,379 | 5000K | 80+ | 100-277V | 0-10V   | ✓   |

✓DesignLights Consortium® Premium Qualified

DIMENSIONS

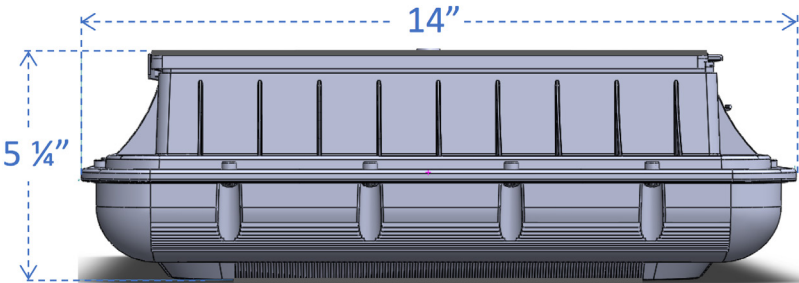

INSTALLATION OPTIONS

