



Color :  Light Almond

UPC Code : 078477043431

Country Of Origin : Mexico

NEMA :  5-15R

Available Colors :



Black



Brown



Gray



Ivory



White

AC1P6-T

Decora® 60W Ultra Fast USB Outlet with Power Delivery, Type A / C Charging Ports, 15A Receptacle - Light Almond

15 Amp, 125 Volt Decora® Tamper Resistant Outlet, 60W (4.5 Amp) Power Delivery USB Charger with 10W Type A / 50W Type C Ports, Back and Side Wire NEMA 5-15R Receptacle, Light Almond

- **ULTRA FAST CHARGING** - 50W USB-C Power Delivery charges up to 4x faster for laptops, tablets, and phones, while the 10W USB-A port lets you power a second device at the same time
- **VERSATILE COMPATIBILITY** – Charges laptops while in use plus iPhone, iPad, Samsung Galaxy, Android devices, tablets, and other large electronics in minutes
- **MODERNIZE ANY ROOM** – Leaded wiring replaces a standard outlet in deep wall boxes and pairs perfectly with Decora screwless wallplates (sold separately) for a seamless finish in home offices
- **ADVANCED SAFETY FEATURES** – Protects against overcharging and overheating; tamper-resistant shutters enhance child safety, and noise-free charge-only USB ports help safeguard your data
- **MAXIMIZE OUTLET SPACE** – Next-Gen charger for multiple devices at once to free up workspace outlets; reduces clutter and eliminates bulky USB adapters for a clean work from home space
- **TRUSTED QUALITY** – Built by a brand with 120+ years of electrical expertise; made in North America for reliable, long-lasting performance

Technical Information

Electrical Specifications

Amperage : 15 A

Dielectric Voltage : 1250 VAC

Grounding : Grounding

Horsepower Rating : ½ hp

Pole(s) : 2

Power Supply Input and

Frequency : 125V, 60Hz

Temperature Rise : Max 30°C

Voltage : 125 VAC

Wire(s) : 3

Environmental Specifications

Flammability Rating : V-0

Operating Temperature :
Maximum Continuous 40°C,
Minimum -10°C (w/o impact)

Material Specifications

Body Material : Thermoplastic

Face Material : Thermoplastic

Line Contacts : Brass

Mechanical Specifications

Product ID : Ratings are marked on device

Screw Terminal Torque : No Terminal Screws

Mounting Strap : Galvanized Steel

Termination : Leaded

TR Shutter : Thermoplastic

Wire Accomodation : Leaded

Product Features

Brand : Decora

Color : Light Almond

Feature(s) : Tamper Resistant

Grade : Residential
/Commercial Specification
Grade

NEMA Configuration : 5-15R

Product Type : USB
Receptacle Outlet

USB Power Delivery : Yes

USB Type : Type A / C

USB Wattage : 60 W

Warranty


Warranty : 1-Year Limited

Standards and Certifications

Applicable Standards & Certifications : FCC Part 15 Class B, cCSAus Listed, NOM, UL 1310, UL 498, UL 1310

NEMA : WD-1 and WD-6

Dimensional Drawing

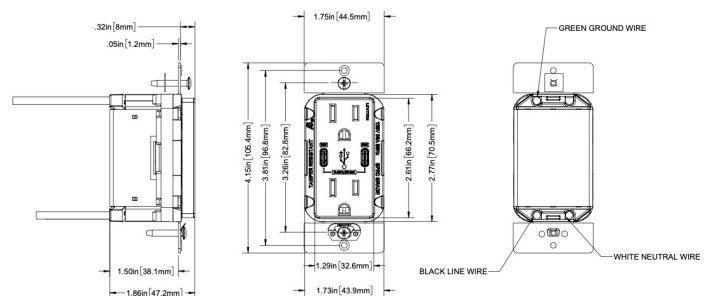

SPECIFICATION SUBMITTAL

JOB NAME: 	CATALOG NUMBERS: 	
JOB NUMBER: 		

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.
T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-461-2002 ·
FAX: +1-800-824-3005 ·

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)
5386- 1797 ·

Visit our Website at: www.leviton.com

© 2026 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:
www.leviton.com/company/about-leviton/locations

© 2026 Leviton Manufacturing Co., Inc.